

# Upgrades for the Precision Proton Spectrometer at the LHC: Precision Timing and Tracking Detectors

Michele Gallinaro<sup>1,a)</sup>

<sup>1</sup> *Laboratório de Instrumentação e Física Experimental de Partículas  
LIP Lisbon  
Av. Elias Garcia, 14 - 1000-149 Lisboa - Portugal*


<sup>a)</sup> on behalf of the CMS and TOTEM collaborations

**Abstract.** The CMS-TOTEM Precision Proton Spectrometer (CT-PPS) is an approved project to add tracking and timing information at approximately  $\pm 210$  m from the interaction point around the CMS detector. It is designed to operate at high luminosity with up to 50 interactions per 25 ns bunch crossing to perform measurements of e.g. the quartic gauge couplings and search for rare exclusive processes. During 2016, CT-PPS took data in normal high-luminosity proton-proton LHC collisions. In the coming years, high radiation doses and large multiple-vertex interactions will represent difficult challenges that resemble those of the high-luminosity LHC program. A coordinated effort of detector upgrades with the goal of reaching the physics goals while mitigating the degradation effects is under way. Upgrades to the tracking and timing detectors are discussed.

## INTRODUCTION

The CMS-TOTEM Precision Proton Spectrometer (CT-PPS) [1] is a joint project of the CMS and TOTEM collaborations aimed at measuring the surviving scattered protons during standard running conditions in regular "high-luminosity" fills. CT-PPS adds precision tracking and timing detectors in the very forward region on both sides of the CMS detector at about 210 meters from the interaction region to study central exclusive production (CEP) in proton-proton collisions. CEP provides a unique method to access a variety of physics topics, such as -among others- new physics searches via anomalous production of W and Z boson pairs, high- $p_T$  jet production, and possibly the production of new resonances.

The CT-PPS detector consists of a silicon tracking system to measure the position and direction of the protons, and a set of timing counters to measure their arrival time. This allows the reconstruction of the mass and momentum as well as of the z coordinate of the primary vertex of the centrally produced system. The protons that have lost a small fraction of their momentum are bent outside the beam profile by the LHC magnets between the Interaction Point (IP) and the detector stations, and their trajectories can be measured in the CT-PPS detector. The detector covers an area transverse to the beam of about  $4 \text{ cm}^2$  on each arm. It uses a total of 144 pixel readout chips and about 200 timing readout channels.

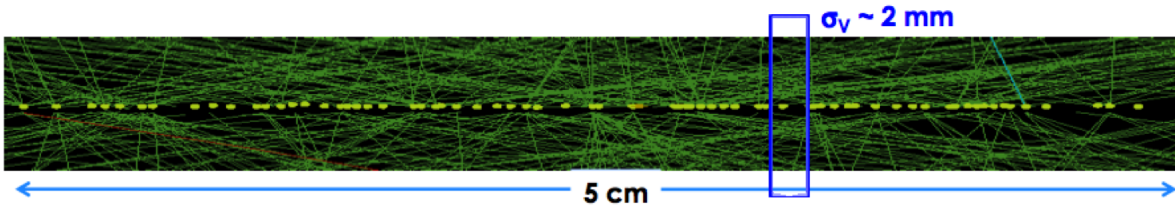

**FIGURE 1.** Zoomed-in view of an event with 78 reconstructed vertices (yellow points) and associated tracks (green lines) collected by the CMS experiment during the LHC Run 1.

Several challenges are to be met for successfully carrying out the physics program. Among those is the ability to operate the detectors close to the beam center, thus enhancing the sensitivity to lower invariant mass systems. A close approach is limited by the interference with the beam, as well as the detector damage caused by the high radiation levels. Studies based on radiation monitors placed on the 220 m TOTEM RP stations yield a total dose of about 100 Gray and a fluence of the order of  $10^{12} n_{eq}cm^{-2}$  per  $100 fb^{-1}$  of integrated luminosity [2]. These are values at the location of front-end electronics in the RPs. A proton flux of up to  $5 \times 10^{15} cm^{-2}$  is expected on the sensors themselves. Furthermore, another challenge comes from the large background expected in the presence of multiple interactions (pileup) per bunch crossing. The number of pileup events was approximately  $\mu=20\div30$  during 2016, and may reach 50 or 100 in the next few years. Figure 1 shows an event with 78 reconstructed vertices collected by the CMS experiment during the LHC Run 1. The dominant background results from inelastic events overlapping with two protons from single diffraction events occurring in the same bunch crossing. This pileup background can be reduced by using proton timing information to determine the z-position of the primary vertex. The expected increased pileup and large radiation doses represent some of the difficult challenges that need to be addressed with a focused upgrade program. Upgrades to the tracking and timing detector systems and associated electronics are foreseen. These are needed in order to maintain the physics goals and be able to efficiently collect the large samples of data necessary to explore the rare processes that may hint at a new panorama in our current understanding of Nature.

## TRACKING DETECTORS

Silicon detectors are widely used in experiments in particle physics. The application of this detector technology is mostly suited for tracking detectors, i.e. detectors which measure the position of charged particles. The enormous progress in improving the resistance to radiation damage and the excellent spatial resolution make this technology well suited for CT-PPS. Tracking detectors are used to measure the position and direction of the outgoing protons. This will allow to reconstruct the mass and momentum of the centrally produced system.

In the past few years there has been considerable progress in silicon sensor technology. At the LHC, both the CMS and ATLAS collaborations have been pursuing improved pixel detector design for the high-luminosity upgrades of the LHC. These efforts culminated with the development of "planar" and "3D" pixel sensor designs [3, 4]. Both technologies can be used for the CT-PPS detector due to their characteristics. These include: 1) efficient tracking close to the physical sensor edge providing single-hit resolution better than  $30\mu m$ , 2) improved radiation hardness to withstand  $5 \times 10^{15}$  protons/cm<sup>2</sup> for an integrated luminosity of  $100 fb^{-1}$ . The 3D sensors consist of an array of columnar electrodes that penetrate through the silicon bulk perpendicularly to the surface. Due to its structure, the inter-electrode distance is decoupled from the sensor substrate thickness allowing to reduce the drift path of the charge carriers. The close spacing between electrodes provides several advantages compared to the planar sensor design. Among others, they are: 1) lower depletion voltage, 2) faster charge collection time, and 3) reduced charge trapping probability, thus reducing the effects of radiation damage. Thanks to their better intrinsic characteristics, 3D sensors are the preferred choice for CT-PPS.

The CT-PPS layout (Figure 2) foresees two RP stations on each side of the IP to be equipped with tracking detectors. These are the horizontal RPs located at  $\pm 210$  m. Each station will contain six planes, where each plane contains a  $1.6 \times 2.4$  cm<sup>2</sup> pixel sensor read out by six PSI46dig readout chips (ROCs). The design of the front-end electronics and of the DAQ is based on that developed for the "Phase 1" upgrade of the CMS silicon pixel detectors. The resolution of the x-coordinate is determined by the charge sharing in the pixel clusters, which depends on the detector tilt angle in the x-z plane. Test beam results with similar sensors indicate that for an angle of 20 degrees the two-pixel clusters give a resolution of the order of  $10\mu m$ . Since there is no tilt in the y-z plane, the resolution of the y-coordinate is of the order of  $30\mu m$ .

During the 2016 data-taking period, the TOTEM silicon strip detectors were used. These detectors were not intended to sustain high radiation doses but were used during this preliminary phase to commission the detector and DAQ operations. About  $15 fb^{-1}$  of data were collected with CT-PPS in "physics" mode at the safe operating position of  $15\sigma$  from the beam. Preparation of the sensors and detector packages, including the readout electronics and the associated mechanics, is ongoing. Starting in 2017, the 3D tracking detectors described above will be installed.

## TIMING DETECTORS

Upgrades for the high-luminosity LHC detectors are driving the efforts on several fronts, including R&D on timing detectors as an important tool to resolve multiple vertices in events with a large number of interactions. Timing



the first detectors already in 2017.

APDs with large amplification are also being exploited for their good timing capabilities. These devices – also known as **HyperFast Silicon Detectors (HFSD)** [11] – use a “deep depleted” technology and operate at gains of  $\sim 500$  in a depleted region deep inside the sensor. They require a large electric field with a voltage of  $\sim 1.8\text{kV}$ . This technology minimizes the drift region to a thin layer of a few  $\mu\text{m}$  near the surface while the fast avalanche develops in the depleted region, thus improving the timing performance. It has a risetime of  $\sim 1\text{ns}$ ; sensors with an area of  $\sim 1\text{cm} \times 1\text{cm}$  can also be made. Developed by RMD (Radiation Monitoring Devices Inc.), this is a radiation-hard technology [12, 13]. Tests are under way to further characterize the effects. A time resolution of less than 20 ps was measured in tests with a muon beam.

## SUMMARY

The CMS-TOTEM Precision Proton Spectrometer (CT-PPS) was approved in 2014 to extend the coverage of the central detector to the region close to the beam at  $\pm 210\text{ m}$  from the interaction region. CT-PPS will allow -for the first time- measurements of central exclusive processes at the electroweak scale, and it will enhance sensitivity to quartic gauge couplings and searches for rare exclusive processes. After an intense preparatory phase, CT-PPS started taking “physics” data in 2016 during high-luminosity fills in proton-proton collisions. A program of detector upgrades is under way to prepare for the regular insertion of the detectors close to the beam during the next few years, with the goal of collecting  $100\text{ fb}^{-1}$  of data. The ability to withstand high radiation doses while retaining accurate tracking reconstruction and fast timing capabilities is the main challenge to meet. Tracking and fast timing detector upgrades have been discussed, together with the R&D program that is actively being pursued for further detector improvements.

## ACKNOWLEDGMENTS

To my TOTEM and CMS colleagues who strenuously contributed to the success of this difficult project becoming a reality, without forgetting that there are still hurdles ahead. To the RD51 colleagues for a stimulating environment where curiosity thrives, something that is often forgotten in our everyday life. To the Organizers for an interesting meeting in a beautiful place, and for a kind and relaxed atmosphere.

## REFERENCES

- [1] CMS and TOTEM Collaborations, “CMS-TOTEM Precision Proton Spectrometer,” CERN-LHCC-2014-021.
- [2] F. Ravotti [TOTEM Collaboration], “First radiation background studies for the TOTEM Roman Pot and T2 detectors,” doi:10.1109/NSSMIC.2011.6154586 (2011).
- [3] S. I. Parker, C. J. Kenney and J. Segal, “3-D: A new architecture for solid state radiation detectors,” Nucl. Instrum. Meth. A **395**, 328 (1997). doi:10.1016/S0168-9002(97)00694-3.
- [4] M. Mathes *et al.*, “Test beam characterizations of 3D silicon pixel detectors,” IEEE Trans. Nucl. Sci. **55**, 3731 (2008) doi:10.1109/TNS.2008.2005630 [arXiv:0806.3337 [physics.ins-det]].
- [5] B. W. Adams *et al.* [LAPPD Collaboration], “A brief technical history of the Large-Area Picosecond Photodetector (LAPPD) Collaboration,” [arXiv:1603.01843 [physics.ins-det]].
- [6] J. Va’vra, “PID techniques: Alternatives to RICH methods,” arXiv:1611.01713 [physics.ins-det].
- [7] M. Berretti [TOTEM Collaboration], “The timing upgrade project of the TOTEM Roman Pots detectors,” Nucl. Instrum. Meth. A **824**, 251 (2016). doi:10.1016/j.nima.2015.09.112.
- [8] H. F. W. Sadrozinski *et al.*, “Ultra-fast silicon detectors (UFSD),” Nucl. Instrum. Meth. A **831**, 18 (2016). doi:10.1016/j.nima.2016.03.093.
- [9] G. Kramberger *et al.*, “Radiation effects in Low Gain Avalanche Detectors after hadron irradiations,” JINST **10**, no. 07, P07006 (2015). doi:10.1088/1748-0221/10/07/P07006.
- [10] N. Cartiglia *et al.*, “Beam test results of a 15 ps timing system based on ultra-fast silicon detectors,” arXiv:1608.08681 [physics.ins-det].
- [11] S. N. White, “R&D for a dedicated fast timing layer in the CMS Endcap upgrade,” Acta Phys. Pol. B Proc. Suppl. **7**, 743 (2014) doi:10.5506/APhysPolBSupp.7.743 [arXiv:1409.1165 [physics.ins-det]].
- [12] M. McClish, R. Farrell, K. Vanderpuye, K. Shah, “A reexamination of deep diffused Si APDs gain and quantum efficiency,” Trans. Nucl. Sci., vol. 53, no. 5, pp. 1-6, 2006.
- [13] S. N. White, private communication.